



## 3M™ Oldham™ BM 25 & BM 25 Wireless

Transportable Gas Detection



### Presentation

The BM 25 packs the benefits of a fixed system area monitor into a rugged, user-friendly and transportable instrument.

It was designed to detect one to five gases for mobile or temporary work applications, team protection, area surveillance, or places where fixed detection systems are not suitable.

- Detect up to 5 gases simultaneously
- 103 dB at 3 feet audible alarm
- Ultra-bright flashing signal at 360°
- Run time of 170 hours
- Resistant to harsh environment
- Easily transportable - less than 15 lbS
- 30 devices per network
- 16 independent networks
- More than 0.5 mile RF line of sight
- Data acquisition to a controller

# 3M™ Oldham™ BM 25 & BM 25 Wireless


## Transportable Gas Detection

Available as an option, the radio communication allows several BM 25 devices to communicate on the same network or to send information wirelessly to a controller.

### A scalable network


Adding a BM 25 on an existing network has never been so easy as you just need to turn it on. The BM 25 is automatically added on the network

- Up to 30 BM 25 can be meshed on the same network
- Up to 16 networks can coexist with no interference

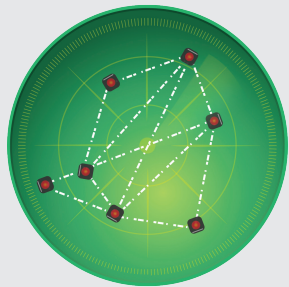


### Alarm Transfer

If a BM 25 goes into gas alarm, all BM25s in the network will report a corresponding alarm.




### Safety Function Remains

If a BM 25 does not respond or if the network is split, then it is possible to continue to work by the time of the restoration of the network. The gas detection remains effective and each BM 25 would still locally alarm in the presence of gas.



### Network Self-Healing

When the obstacle is gone, the communication resumes automatically. The two groups merge together to form only one group again.

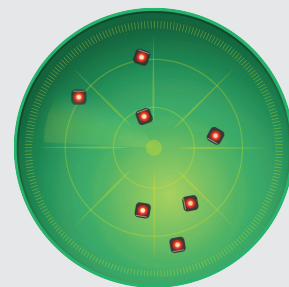

## How does the MESH network, work?

Hosts are connected peer-to-peer manner, forming a net-like structure

- No central hierarchy
- Each node can receive, send and relay data
- If a node is down, it goes through another route
- Maximum distance between two communicating devices is 0.6 mile line of sight

## Benefits of Mesh Topology:


- Fast and simple deployment
- High coverage versatility
- High fault tolerance
- Significantly reduces installation and network operating costs

## Alarm & Datalogging Capabilities:

- 360° flashing sign<sup>al</sup>
- 103 dB at 3 feet audible alarm.
- STEL and TWA values are available
- Datalogging capacity of more than four months (for 5 gases configuration).

## Batteries

- Provide up to 170 hours of continuous runtime
- Full recharge in only 4 1/2 hours
- Safe trickle charger for long-term monitoring in classified zones.

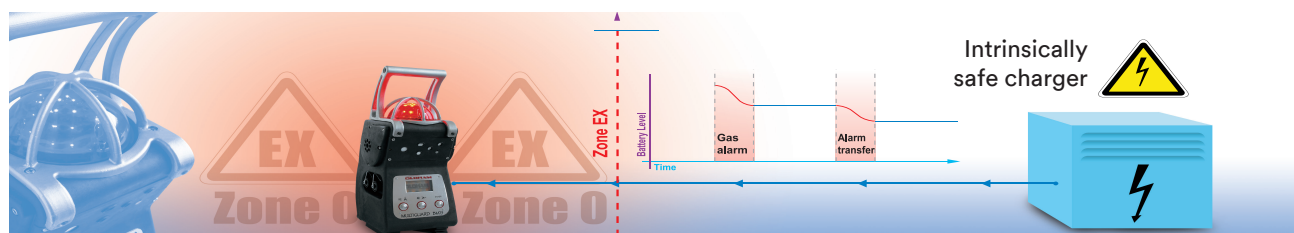


Trickle charge for long term area monitoring

# 3M™ Oldham™ BM 25 & BM 25 Wireless

Transportable Gas Detection

## Smartwireless HMI

BM 25s send fault status, alarm status and gas measurements to the controller. As soon as one BM 25 fires an alarm, the controller relays the information to all BM 25s on the same network that then turn in Alarm Transfer mode.

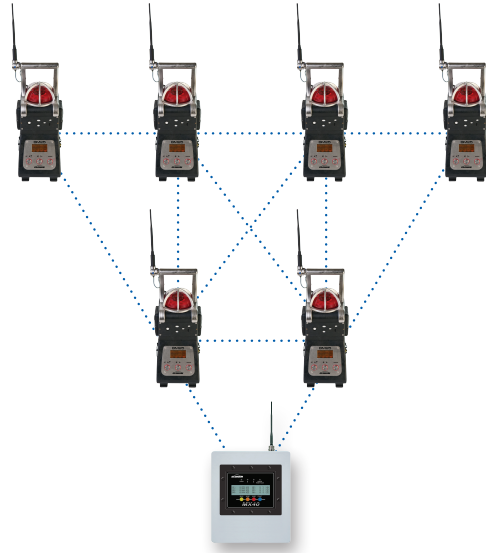

## MX40 Controller

The SmartWireless® MX 40 Controller provides operator interface to the network and real time status display of all network devices. Flexible and expandable, a MX 40 network consists of any combination of (up to 16) BM 25 wireless and/or (up to 32) wireless and/or wired sensors, one or more control panels, and alarm warning devices. Command functions include alarm reset, alarm acknowledge, alarm test and radio silence. The control panel displays real time gas concentrations, field device status, battery levels, network RF signal quality and fault diagnostic conditions. Display indications include alarm status, channel, gas reading, battery life & link signal strength. Standard features include removable SD card with datalogging.

The Model MX 40 also allows for expanded use of Oldham addressable I/O modules that include a 4-channel 4-20mA input module (DA-4), a 4-alarm relay output module (RL-4), a 4-channel 4-20mA output module (AO-4), and a 4-relay contact input module (DI-4). Oldham modules can be mounted within the main system enclosure or installed remotely to simplify field wiring.

# 3M™ Oldham™ BM 25 & BM 25 Wireless

## Transportable Gas Detection

Technical specification		certifications																																																															
Instrument Warranty::	Two-year warranty, excluding consumables (sensors, filters, etc.)																																																																
Case Material:	IP66 - Impact resistant polycarbonate																																																																
Dimensions:	470 x 180 x 190 mm (16.7" x 7.1" x 7.5")																																																																
Weight:	6.8 kg (15 lbs)																																																																
Display:	Graphic liquid crystal display with backlight																																																																
Sensors:	Combustible Gas – Catalytic Diffusion Methane, Propane, Butane, Isobutane, LPG, Ethanol, Pentane – Infrared Oxygen and Toxic Gases – Electrochemical CO2 – Infrared Isobutylene – PID																																																																
Measuring ranges:	<table border="0"> <tr> <td>Combustible Gases:</td> <td>0-100% LEL in 1% increments</td> </tr> <tr> <td>Methane:</td> <td>0-100% LEL in 1% increments – Infrared</td> </tr> <tr> <td>Methane:</td> <td>0-100% of volume in 1% increments – Infrared</td> </tr> <tr> <td>Propane:</td> <td>0-100% LEL in 1% increments – Infrared</td> </tr> <tr> <td>Butane:</td> <td>0-100% LEL in 1% increments – Infrared</td> </tr> <tr> <td>Isobutane:</td> <td>0-100% LEL in 1% increments – Infrared</td> </tr> <tr> <td>LPG:</td> <td>0-100% LEL in 1% increments – Infrared</td> </tr> <tr> <td>Ethanol:</td> <td>0-100% LEL in 1% increments – Infrared</td> </tr> <tr> <td>Pentane:</td> <td>0-100% LEL in 1% increments – Infrared</td> </tr> <tr> <td>Oxygen:</td> <td>0-30% Volume in 0.1% increments</td> </tr> <tr> <td>Carbon Monoxide:</td> <td>0-1,000 ppm in 1 ppm increments</td> </tr> <tr> <td>Hydrogen Sulfide:</td> <td>0-100 ppm in 1 ppm increments</td> </tr> <tr> <td>Hydrogen:</td> <td>0-2,000 ppm in 1 ppm increments</td> </tr> <tr> <td>Sulfur Dioxide:</td> <td>0-30 ppm in 0.1 ppm increments</td> </tr> <tr> <td>Chlorine:</td> <td>0-10 ppm in 0.1 ppm increments</td> </tr> <tr> <td>Nitrogen Dioxide:</td> <td>0-30 ppm in 0.1 ppm increments</td> </tr> <tr> <td>Nitric Oxide:</td> <td>0-300 ppm in 1 ppm increments</td> </tr> <tr> <td>Hydrogen Chloride:</td> <td>0-30 ppm in 0.1 ppm increments</td> </tr> <tr> <td>Hydrogen Cyanide:</td> <td>0-10 ppm in 0.1 ppm increments</td> </tr> <tr> <td>Ammonia:</td> <td>0-1,000 ppm in 1 ppm increments</td> </tr> <tr> <td>Phosphine:</td> <td>0-1 ppm in 0.01 ppm increments</td> </tr> <tr> <td>Arsine:</td> <td>0-1 ppm in 0.01 ppm increments</td> </tr> <tr> <td>Silane:</td> <td>0-50 ppm in 0.1 ppm increments</td> </tr> <tr> <td>Ethylene Oxide:</td> <td>0-30 ppm in 0.1 ppm increments</td> </tr> <tr> <td>Carbon Dioxide:</td> <td>0-5% of volume in 0.1% increments</td> </tr> <tr> <td>Isobutylene:</td> <td>0-1,500 ppm in 1 ppm increments</td> </tr> <tr> <td>Fluorhydric Acid :</td> <td>0-10 ppm 0.1 ppm increments</td> </tr> <tr> <td>Ozone:</td> <td>0-1 ppm 0.01 ppm increments</td> </tr> <tr> <td>Phosgene:</td> <td>0-1 ppm 0.01 ppm increments</td> </tr> <tr> <td>Chlorine Dioxide :</td> <td>0-3 ppm 0.01 ppm increments</td> </tr> <tr> <td>Hydrazine :</td> <td>0-1 ppm 0.01 ppm increments</td> </tr> </table>			Combustible Gases:	0-100% LEL in 1% increments	Methane:	0-100% LEL in 1% increments – Infrared	Methane:	0-100% of volume in 1% increments – Infrared	Propane:	0-100% LEL in 1% increments – Infrared	Butane:	0-100% LEL in 1% increments – Infrared	Isobutane:	0-100% LEL in 1% increments – Infrared	LPG:	0-100% LEL in 1% increments – Infrared	Ethanol:	0-100% LEL in 1% increments – Infrared	Pentane:	0-100% LEL in 1% increments – Infrared	Oxygen:	0-30% Volume in 0.1% increments	Carbon Monoxide:	0-1,000 ppm in 1 ppm increments	Hydrogen Sulfide:	0-100 ppm in 1 ppm increments	Hydrogen:	0-2,000 ppm in 1 ppm increments	Sulfur Dioxide:	0-30 ppm in 0.1 ppm increments	Chlorine:	0-10 ppm in 0.1 ppm increments	Nitrogen Dioxide:	0-30 ppm in 0.1 ppm increments	Nitric Oxide:	0-300 ppm in 1 ppm increments	Hydrogen Chloride:	0-30 ppm in 0.1 ppm increments	Hydrogen Cyanide:	0-10 ppm in 0.1 ppm increments	Ammonia:	0-1,000 ppm in 1 ppm increments	Phosphine:	0-1 ppm in 0.01 ppm increments	Arsine:	0-1 ppm in 0.01 ppm increments	Silane:	0-50 ppm in 0.1 ppm increments	Ethylene Oxide:	0-30 ppm in 0.1 ppm increments	Carbon Dioxide:	0-5% of volume in 0.1% increments	Isobutylene:	0-1,500 ppm in 1 ppm increments	Fluorhydric Acid :	0-10 ppm 0.1 ppm increments	Ozone:	0-1 ppm 0.01 ppm increments	Phosgene:	0-1 ppm 0.01 ppm increments	Chlorine Dioxide :	0-3 ppm 0.01 ppm increments	Hydrazine :	0-1 ppm 0.01 ppm increments
Combustible Gases:	0-100% LEL in 1% increments																																																																
Methane:	0-100% LEL in 1% increments – Infrared																																																																
Methane:	0-100% of volume in 1% increments – Infrared																																																																
Propane:	0-100% LEL in 1% increments – Infrared																																																																
Butane:	0-100% LEL in 1% increments – Infrared																																																																
Isobutane:	0-100% LEL in 1% increments – Infrared																																																																
LPG:	0-100% LEL in 1% increments – Infrared																																																																
Ethanol:	0-100% LEL in 1% increments – Infrared																																																																
Pentane:	0-100% LEL in 1% increments – Infrared																																																																
Oxygen:	0-30% Volume in 0.1% increments																																																																
Carbon Monoxide:	0-1,000 ppm in 1 ppm increments																																																																
Hydrogen Sulfide:	0-100 ppm in 1 ppm increments																																																																
Hydrogen:	0-2,000 ppm in 1 ppm increments																																																																
Sulfur Dioxide:	0-30 ppm in 0.1 ppm increments																																																																
Chlorine:	0-10 ppm in 0.1 ppm increments																																																																
Nitrogen Dioxide:	0-30 ppm in 0.1 ppm increments																																																																
Nitric Oxide:	0-300 ppm in 1 ppm increments																																																																
Hydrogen Chloride:	0-30 ppm in 0.1 ppm increments																																																																
Hydrogen Cyanide:	0-10 ppm in 0.1 ppm increments																																																																
Ammonia:	0-1,000 ppm in 1 ppm increments																																																																
Phosphine:	0-1 ppm in 0.01 ppm increments																																																																
Arsine:	0-1 ppm in 0.01 ppm increments																																																																
Silane:	0-50 ppm in 0.1 ppm increments																																																																
Ethylene Oxide:	0-30 ppm in 0.1 ppm increments																																																																
Carbon Dioxide:	0-5% of volume in 0.1% increments																																																																
Isobutylene:	0-1,500 ppm in 1 ppm increments																																																																
Fluorhydric Acid :	0-10 ppm 0.1 ppm increments																																																																
Ozone:	0-1 ppm 0.01 ppm increments																																																																
Phosgene:	0-1 ppm 0.01 ppm increments																																																																
Chlorine Dioxide :	0-3 ppm 0.01 ppm increments																																																																
Hydrazine :	0-1 ppm 0.01 ppm increments																																																																
WIRELESS NETWORK:	» 2.4 GHz - 100 mW - IEEE 802.15.4 » 30 devices per network » 16 independent networks » Communication distance : 0.6 mile line of sight																																																																
MX 40:	Up to 32 Devices, Wired or Wireless Up to 16 BM 25 NEMA4X Package Configurable up to eight zones Alarm and Fault Condition LEDs Display Indicates: Field Device Location, Alarm Status, Channel, Gas Reading, Battery Life & Signal Strength																																																																
Datalogging Capacity:	200,000 measurements																																																																
Audible Alarm:	103 dB @ 1 meter																																																																
Visual Alarm:	Ultrabright LED beacon visible 360 degrees																																																																
Operating Temperature Range:	-20°C to +50°C (-4°F to 122°F) sensor dependent																																																																
Operating Humidity Range:	1% to 99% RH sensor dependent																																																																
Power Source (Run Time)	NiMH (up to 170 hours operating time, 135 hours in wireless mode)																																																																
Recharge Time:	4.5 hours, typical																																																																
		<b>ATEX &amp; IECEx VERSIONS</b>																																																															
BM 25 (standard version)		Without IR sensor: II 1G / I M1 Ex ia IIC T4 Ga / Ex ia I Ma																																																															
		With IR sensor: II 2G / I M2 Ex ia d IIC T4 Gb / Ex ia d I Mb																																																															
BM 25 W (wireless version)		Without IR sensor: II 1G / I M1 Ex ia IIB T4 Ga / Ex ia I Ma or II 2G / I M2 Ex ia d IIC T4 Gb / Ex ia I Mb																																																															
		With IR sensor: II 2G / I M2 Ex ia d IIC T4 Gb / Ex ia d I Mb																																																															
		<b>CSA VERSION</b>																																																															
BM 25 (standard and wireless versions)		Ex d ia IIC T4 Class I, Div 1, Gr ABCD (for Canada Only) Class I, Div 2, Gr ABCD (for US Only)																																																															
		AEx d ia IIC T4 Class I, Zone 1 (for US Only)																																																															
		C22.2 No.152 (% LEL only) ISA-12.13.01-2000 BM25 with pump or PID sensor or infrared sensor for combustible gases is not CSA certified.																																																															
		<b>NMETRO VERSION</b>																																																															
BM 25 (standard version)		Ex ia I Ma Ex ia IIC T4 Ga IP66 -20 °C ≤ Ta ≤ +55 °C																																																															
		Without sensor IR:																																																															
		With sensor IR: Ex d ia I Mb Ex d ia IIC T4 Gb IP66 -20 °C ≤ Ta ≤ +55 °C																																																															
BM 25 W (wireless version)		Ex ia I Mb Ex ia IIC T4 Gb Ex ia IIB T4 Ga IP66 -20 °C ≤ Ta ≤ +55 °C																																																															
		Without sensor IR:																																																															
		With sensor IR: Ex db ia I Mb Ex db ia IIC T4 Gb IP66 -20 °C ≤ Ta ≤ +55 °C																																																															
		<b>EAC VERSION</b>																																																															
BM 25 / BM 25W		TP TC 012/2011																																																															
		0Ex ia IIC T4 Ga X, PO Ex ia I Ma X (BM 25 with electrochemical cells)																																																															
		1Ex ia d IIC T4 Gb X, PB Ex ia d I Mb X (BM25 with infrared cells, BM25W with infrared or catalytic cells)																																																															
		0Ex ia IIB T4 Ga X, PO Ex ia I Ma X (BM25W with electrochemical cells)																																																															

### Americas - Texas (USA)

4055 Technology Forest Blvd.  
The Woodlands, TX 77381  
Tel.: +1 713-559-9200  
Fax: +1 713-893-6729

### Emea

ZI Est, Rue Orfila,  
CS 20417  
62027 ARRAS CEDEX, France  
Tel.: +33-3-21-60-80-80  
Fax: +33-3-21-60-80-00

### Asia Pacific

290 Guiqiao Road  
Pudong, Shanghai 201206  
People's Republic of China  
Tel.: +86-21-3127-6373  
Fax: +86-21-3127-6365

