



## **RAEGuard 2 PID**

Fixed photoionisation detector (PID)

## MODEL OPTIONS: PUMPED OR DIFFUSION

- Pumped is used for sticky gas
- Diffusion is used for high humidity ambients

## REDUCED MAINTENANCE COSTS

- Easy to remove sensor module in hazardous locations without use of tools

## REDUCED LIFE COSTS

- Unique lamp design makes the product more robust and enables longer life time

## AVAILABILITY

- Continuous VOC monitoring in hazardous and non-hazardous locations

## PROVIDES FASTER RESPONSE TIMES

- The sample flow-through design powered by an internal diaphragm pump provides faster response times

## ACCURATE READINGS

- Guaranteed by humidity compensation even in humid environments

## ADVANCED TECHNOLOGY

- Patented pump duty cycle extending the sensor and lamp cleaning interval
- Patented Electronic Zero keeping the zero point stable
- Patented 3D sensor technology lower quenching effect - faster response to high concentration - lower RH response

## SUITABLE FOR A WIDE RANGE OF APPLICATIONS

- Over 200 correction factors<sup>1</sup> are pre-programmed and allow users to display readings of specific target gas

## KEY APPLICATIONS AND THEIR VOCs

- Benzene in refinery analyser shelters
- Ammonia in industry
- Vinyl Chloride in chemical manufacturing
- Toluene or Ammonia in semi-conductor plants
- Solvent and chemicals storage
- Phenol and DME in pharmaceutical
- Toluene in printing
- Air quality
- Methyl Ethyl Ketone in paint spray booths
- Heat transfer fluids
- Acetone, Xylene, Phenol in medical, pathology, histology lab

# Status at a glance

The RAEGuard 2 PID operates on 10 to 28 VDC and provides an analogue (4-20 mA) three-wire signal output, and RS-485 Modbus digital signal output. It is available in two different models, pumped or diffusion, to best fit your needs.

Calibration has been greatly simplified with the introduction of Electronic Auto-Zero patented by Honeywell.

The RAEGuard 2 PID is utilizing many of Honeywell's PID patents such as the Electronic Auto-Zero that guarantees an incomparable base line stability making it the best in class product.

Polynomial based calibration provides superior calibration linearity throughout the full range.

The RAEGuard 2 PID has a graphic display and LED light status indicator for fault and alarm conditions. In addition, low, high, and fault relays<sup>1</sup> can be configured to trigger external alarms or process controls.

A magnetic key interface enables the detector to be calibrated and operational parameters adjusted with the explosion-proof enclosure in place.


<sup>1</sup>Relays and correction factors are disabled when using the 1 to 1000 ppm DigiPID



# Technical Specifications



RAEGuard 2 Fixed Sensor Head

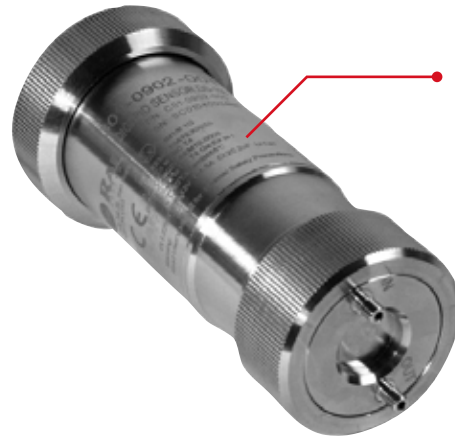

DigiPID Sensor Module

## RAEGUARD 2 FIXED SENSOR HEAD SPECIFICATIONS

| BASIC PARAMETERS                                      |   |
|---|---|
| WORKING CURRENT                                       | DC 10 to 28 V, 210 mA at 24 V   |
| POWER   | <5 W  |
| OUTPUT  | 4-20 mA<br>Three-level programmable alarm relays (30 VDC, 2A)<br>RS-485 (Supports Modbus) |
| SAMPLING  | Internal diaphragm pump, up to 500 cc/min   |
| IP RATING   | IP65  |
| MECHANICAL INTERFACE                                  | 3/4 in NPT Male   |
| INSTALLATION  | 50.8 mm (2 in) pipe-holding or wall mounting  |
| USER INTERFACE  | Three-key magnetic bar adjustment   |
| CALIBRATION   | Two points  |
| WARRANTY  | 1 year for the pump, 2 years for the housing and electronics                              |
| ENVIRONMENTAL PARAMETERS                              |   |
| TEMPERATURE   | -20°C to +55°C (-4°F to 131°F)  |
| HUMIDITY  | 0 to 95% relative humidity, non-condensing  |
| PRESSURE  | 90 to 110 kPa   |
| DISPLAY   |   |
| DISPLAY   | 128 x 64 matrix backlit LCD, supports graphic display                                     |
| 128 X 64 MATRIX BACKLIT LCD, SUPPORTS GRAPHIC DISPLAY |   |
| SIZE  | 10.1 in L x 7.9 in W x 4.2 in H (257 x 201 x 107 mm)                                      |
| WEIGHT  | 3.5 kg (7.7 lbs)  |
| MATERIAL  | 316 stainless steel   |
| CERTIFICATION   |   |
| ATEX  | Ex II 2(1)G, Ex d [ia Ga] IIC T4 Gb   |
| UL/CSA  | Class 1, Div. 1, Groups ABCD T4   |
| IECEX   | Ex d [ia Ga] IIC T4, Gb   |
| TR CU   | 1Ex d [ia Ga] IIC T4 Gb X   |

## DIGIPIID SENSOR MODULE SPECIFICATIONS

| POWER SUPPLY          | 5 V ±0.25 V DC  |
|-----------------------|---|
| CURRENT               | 110 mA max  |
| POWER CONSUMPTION     | < 0.6 W   |
| MEASURING RANGE       | 0.01 to 100 ppm<br>0.1 to 1000 ppm<br>1 to 1000 ppm (No relays or correction factors)                 |
| RESOLUTION            | 10 ppb, 1 ppm (depends on model)  |
| RESPONSE TIME         | (T90): <30 s pumped version will provide improved response and recovery times on sticky gas           |
| CALIBRATION           | Two-point off-line and field calibration<br>Optional three-point calibration                          |
| ACCURACY              | ±2% for calibration point   |
| ANALOGUE OUTPUT       | 0.5 - 2.5 V (ro=1.0 k)  |
| DIGITAL INTERFACE     | Serial Interface (UART)<br>Transmit (Tx): 3.3V TTL<br>Receive (Rx): 3.3V TTL                          |
| WARRANTY              | 2 years for the lamp, 1 year for the sensor, electronics and housing                                  |
| OPERATING TEMPERATURE | -20°C to +55°C (-4°F to +131°F)   |
| HUMIDITY              | 0 to 95% RH non-condensing  |
| EMI/RFI               | Highly resistant to EMI/RFI compliant with EMC directive 2004/108/EC                                  |
| PACKAGE               | 316 stainless steel<br>Spray watertight for IP-65 rating<br>Dust membrane for sensor front protection |
| SIZE                  | 49 mm x 150.8 mm (1.92 in D x 5.94 in L)  |
| WEIGHT                | < 550 g (19.4 oz)   |
| CERTIFICATION         |   |
| ATEX                  | II 1 G EX ia IIC T4 and 1M1 Ex ia I   |
| UL/CSA                | Class I, Div. 1, Groups A B C D T4  |
| IECEX                 | Ex ia IIC T4 Ga and Ex ia I   |
| TR CU                 | 0Ex ia IIC T4 Ga X  |

## RAEGUARD ORDERING OPTIONS

|                                       |  |
|---------------------------------------|--|
| RAEGUARD 2 FIXED SENSOR HEAD INCLUDES | <ul style="list-style-type: none"> <li>Explosion-proof stainless steel enclosure with LCD display, integrated sampling pump and relays, digital connector for external sensors</li> <li>Magnetic key</li> </ul>  |
| DIGIPIID SENSOR MODULE INCLUDES       | <ul style="list-style-type: none"> <li>Complete stainless steel PID sensor module with UV lamp and digital connector output for use with RAEGuard 2</li> <li>Choice of detection range 0.01 to 100 ppm, 0.1 to 1000 ppm or 1 to 1000 ppm</li> <li>DigiPID maintenance kit</li> </ul> |
| RAEGUARD 2 PID KITS INCLUDES          | <ul style="list-style-type: none"> <li>All RAEGuard 2 Fixed Sensor Head contents and all DigiPID contents as stated above</li> </ul>   |



# Honeywell Gas Detection

Honeywell is able to provide gas detection solutions to meet the requirements of all applications and industries.

## Find out more:

[www.honeywellanalytics.com](http://www.honeywellanalytics.com)  
[www.raesystems.com](http://www.raesystems.com)

## Europe, Middle East, Africa

Life Safety Distribution GmbH  
Javastrasse 2  
8604 Hegnau  
Switzerland  
Tel: +41 (0) 44 943 4300  
Fax: +41 (0) 44 943 4398  
[gasdetection@honeywell.com](mailto:gasdetection@honeywell.com)

## Customer Service:

Tel: 00800 333 222 44  
(Freephone number)  
Tel: +41 44 943 4380  
(Alternative number)  
Fax: 00800 333 222 55  
Middle East Tel: +971 4 450  
5800 (Fixed Gas Detection)  
Middle East Tel: +971 4 450  
5852 (Portable Gas Detection)

[www.honeywell.com](http://www.honeywell.com)

## Americas

Honeywell Analytics Distribution Inc.  
405 Barclay Blvd.  
Lincolnshire, IL 60069  
USA  
Tel: +1 847 955 8200  
Toll free: +1 800 538 0363  
Fax: +1 847 955 8210  
[detctgas@honeywell.com](mailto:detctgas@honeywell.com)

Honeywell RAE Systems  
Tel: +1 408 952 8200  
Toll Free: +1 888 723 4800  
Fax: +1 408 952 8480

HIS\_Gas\_RAEGuard 2 PID\_DS\_EMEA\_0419  
© 2019 Honeywell International Inc.  
All rights reserved.

## Asia Pacific

Honeywell Industrial Safety  
7F SangAm IT Tower,  
434, Worldcupbuk-ro, Mapo-gu,  
Seoul 03922,  
Korea  
Tel: +82 (0) 2 6909 0300  
Fax: +82 (0) 2 2025 0328  
India Tel: +91 124 4752700  
China Tel: +86 10 5885 8788 3000  
[analytics.ap@honeywell.com](mailto:analytics.ap@honeywell.com)

## Technical Services:

EMEA: [HAexpert@honeywell.com](mailto:HAexpert@honeywell.com)  
US: [ha.us.service@honeywell.com](mailto:ha.us.service@honeywell.com)  
AP: [ha.ap.service@honeywell.com](mailto:ha.ap.service@honeywell.com)

While every effort has been made to ensure accuracy in this publication, no responsibility can be accepted for errors or omissions. Data may change, as well as legislation, and you are strongly advised to obtain copies of the most recently issued regulations, standards, and guidelines. This publication is not intended to form the basis of a contract.

# Honeywell