
## V-EDGE® 2.4 m (8 ft.) Cable

## **Personal Fall Limiters**



Specifically engineered and tested for use at foot-level tie-off, the V-EDGE PFL meets EN 360: 2002; CNB/P/11.060, CNB/P/11.062, and CNB/P/11.085 and requirements and can be used in over head, horizontal, and foot-level applications.



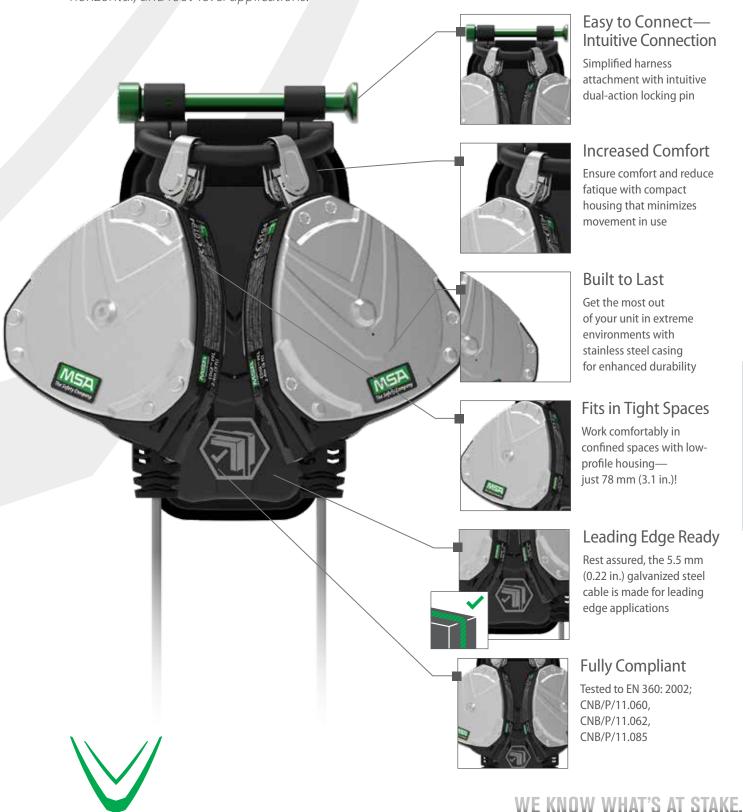

## Ordering Information

Dove	Туре		Line	Line		
Part Number	Single-leg	Twin-leg	Line	Type	Anchorage Connection	Harness Connection
63062-00JEU			2.4 m (8 ft.)	Cable	Aluminium Swivel Scaffolding Hook	Locking Pin
63062-00CEU			2.4 m (8 ft.)	Cable	Aluminium Swivel Triple-Lock Carabiner	Locking Pin
63062-00EEU			2.4 m (8 ft.)	Cable	Steel Swivel Snaphook	Locking Pin
63062-00IEU			2.4 m (8 ft.)	Cable	Steel Swivel Scaffolding Hook	Locking Pin
63162-00JEU			2.4 m (8 ft.)	Cable	Aluminium Swivel Scaffolding Hook	Locking Pin
63162-00CEU			2.4 m (8 ft.)	Cable	Aluminium Swivel Triple-Lock Carabiner	Locking Pin
63162-00EEU			2.4 m (8 ft.)	Cable	Steel Swivel Snaphook	Locking Pin
63162-00IEU			2.4 m (8 ft.)	Cable	Steel Swivel Scaffolding Hook	Locking Pin







Aluminium Swivel Scaffolding Hook



Aluminium Swivel Triple-lock Carabiner



Steel Swivel Snaphook



Steel Swivel Scaffolding Hook

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings read and understood. Only they contain the complete and detailed information

MSA Great Britain Hopton Park, Devizes, Wiltshire, SN10 2JP 0800 066 2222 Phone info.GB@MSAsafety.com www.MSAsafety.com

concerning proper use and care of these products.